


Procedure to activate SRT Protocol:




On GY-HC900U

1. Check the firmware version of the camera from Menu > System > System Information > Version. For GY-HC900U, FW should be v0300-0250 or later. If not, download and apply latest firmware.
2. After update, copy activation file FIRMWARE_CHG2_SRT to a blank SD/SDHC/SDXC card.
3. Connect AC adaptor or battery.
4. While camera is powered off, press and hold ONLINE/5 + CAM/MEDIA buttons together.

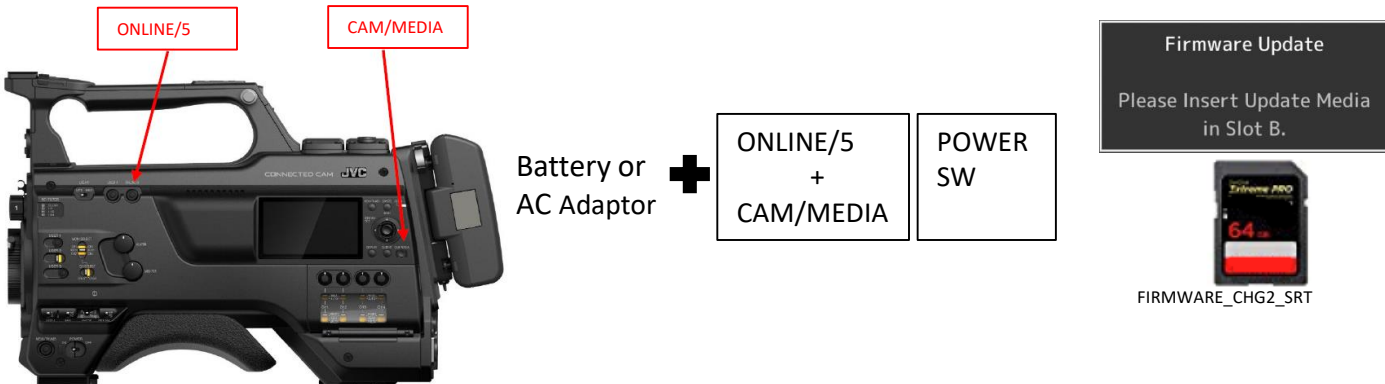

5. Turn on the power and keep holding the 2 buttons until the message “Please Insert Update Media in Slot B” appears. Insert SD card to Slot B and activation starts.
6. When completed, eject SD card, momentarily remove battery or AC adaptor to reset power.
7. When power is reapplied, verify SRT is present from Menu > Network > Live Streaming > Streaming Server > Live Streaming Set > Server1 > Type. (Note: Both Zixi and SRT protocols cannot coexist in the same camera)

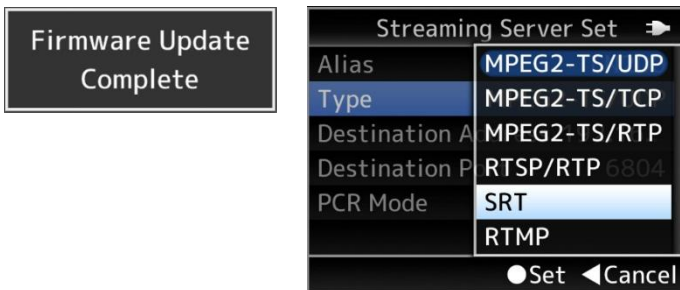


Procedure to restore Zixi Protocol:



On GY-HC900U

1. Copy activation file FIRMWARE_CHG2_ZIXI to a blank SD/SDHC/SDXC card.
2. Connect AC adaptor or battery.
3. While camera is powered off, press and hold ONLINE/5 + CAM/MEDIA buttons together.

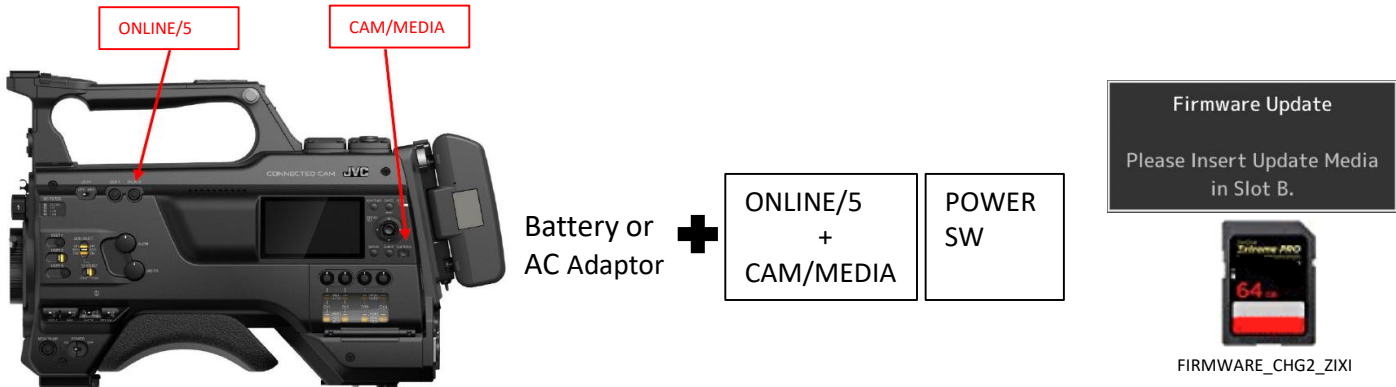

5. Turn on the power and keep holding the 2 buttons until the message “Please Insert Update Media in Slot B” appears. Insert SD card to Slot B and update starts.
6. When completed, eject SD card, momentarily remove battery or AC adaptor to reset power.
7. When power is reapplied, verify Zixi is present from Menu > Network> Live Streaming > Streaming Server > Live Streaming Set > Server1 > Type. (Note: Both Zixi and SRT protocols cannot coexist in the same camera)

